

MONO CRYSTALLINE DOUBLE-GLASS HALF CUT BIFACIAL MODULE

440 / 445 / 450 / 455 / 460 Watts

Panther Series



Overview

Ground breaking technology; higher power output, improved system performance - the ideal solution for end users who want a fast turnaround on their investments. A fully certified premium quality and high efficiency module made with A Grade materials.

Key Benefits




Certified by Independent Engineering Bodies



Product Liability Insurance



Ultra High Power Output



25 Years Limited Product Warranty



Low Resistive Losses



Higher Light Conversion



Guaranteed mechanical resistance to severe weather conditions



Positive Tolerance




100 % electro-luminescence tested

Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE Fire safety Class C according to UL790
Wind and Snow Loads Testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Power Tolerance	Guaranteed +0/+5W (STC condition)
Warranties	25-year limited product warranty 15-year manufacturer warranty on 91.84% of the nominal performance 30-year transferable linear power output warranty

Linear Performance Warranty

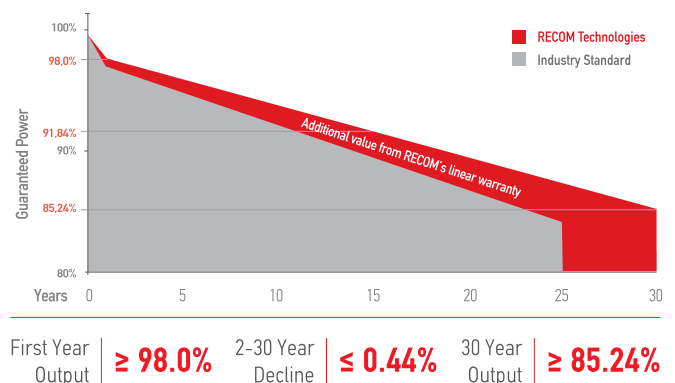

Panther

MONO CRYSTALLINE DOUBLE-GLASS HALF CUT BIFACIAL MODULE

RCM-xxx-7DBME (xxx=440-460)

Electrical Characteristics

POWER CLASS ⁽¹⁾			440		445		450		455		460	
Testing Condition			STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power	Pmax	[Wp]	440	324	445	328	450	331	455	335	460	339
Maximum Power Voltage	Vmp	[V]	34,20	31,94	34,50	32,14	34,70	32,34	34,90	32,54	35,20	32,74
Maximum Power Current	Imp	[A]	12,84	10,14	12,90	10,21	12,96	10,24	13,02	10,30	13,08	10,35
Open Circuit Voltage	Voc	[V]	41,00	38,28	41,20	38,48	41,40	38,68	41,60	38,88	41,80	39,08
Short Circuit Current	Isc	[A]	13,58	10,68	13,63	10,73	13,68	10,78	13,73	10,83	13,78	10,88
Module Efficiency	Eff	[%]	20,33		20,56		20,79		21,02		21,25	
Maximum Series Fuse	IR	[A]	25									
Maximum System Voltage	Vsys	[V]	1500V DC									

(1) Measurement Tolerances: P_{max} (± 3%), I_{sc} & V_{oc} (± 3%) - Power Classification 0/+5W

(2) STC (Standard Testing Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5

(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m², NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

Bi Facial Output (4)


POWER CLASS			440		445		450		455		460	
			P _{max} [Wp]	Eff [%]	P _{max} [Wp]	Eff [%]	P _{max} [Wp]	Eff [%]	P _{max} [Wp]	Eff [%]	P _{max} [Wp]	Eff [%]
Power with Backside Gain	+5	[%]	462,0	21,3%	467,3	21,6%	472,5	21,8%	477,8	22,1%	483,0	22,3%
	+10	[%]	484,0	22,4%	489,5	22,6%	495,0	22,9%	500,5	23,1%	506,0	23,4%
	+15	[%]	506,0	23,4%	511,8	23,6%	517,5	23,9%	523,3	24,2%	529,0	24,4%
	+20	[%]	528,0	24,4%	534,0	24,7%	540,0	24,9%	546,0	25,2%	552,0	25,5%
	+25	[%]	550,0	25,4%	556,3	25,7%	562,5	26,0%	568,8	26,3%	575,0	26,6%
	+30	[%]	572,0	26,4%	578,5	26,7%	585,0	27,0%	591,5	27,3%	598,0	27,6%

(4) Bifaciality Factor > 70% - Back-side power gain depends upon the specific project albedo - Efficiency is according to the surface of the module

Mechanical Data

Dimensions	1909 mm x 1134 mm x 35 mm
Weight	27,0 Kg
Cell Type	Mono Perc - 182mm x 91mm (2 x 60 Pcs) -M10
Front Glass	2.0 mm Tempered and low iron glass- ARC
Rear Side	2.0 mm Tempered and low iron glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 - 3 Bypass diodes
Connector	MC4 compatible
Output cable	4mm² - Landscape = (-) 1200mm (+) 1200mm Portrait = (-) 200mm (+) 300mm or customized

Dimensions

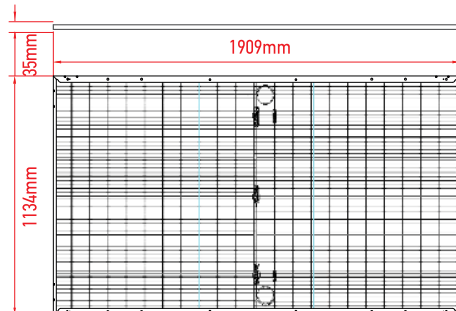


RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

www.recom-tech.com

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

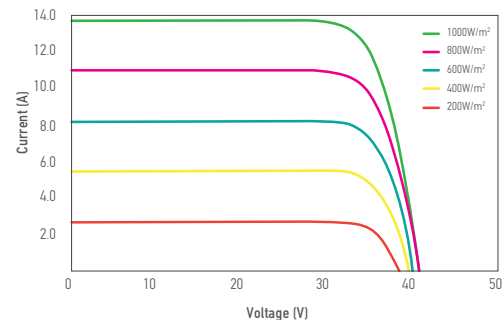

Temperature Characteristics

P _{max} Temperature Coefficient	-0.36% / °C
V _{oc} Temperature Coefficient	-0.28% / °C
I _{sc} Temperature Coefficient	+0.05% / °C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Module Temperature (NMOT)	42 ± 2 °C

Packing Configuration

Container	40' (HC)
Pieces per Pallet	31
Pallets per Container	24
Pieces per Container	(31+31)x12=744 pcs

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, RECOM Technologies reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Please read the safety and installation instructions before using the modules.